

## DSP6120

### 120W Column Surface-Mount Loudspeaker



#### Description

The DSP6120 is a 120W low-impedance professional conference speaker featuring an aluminum alloy housing with a highly textured appearance. It delivers professional-grade sound performance and meets the requirements of demanding venues.

#### Features


- Rated power: 120W
- Frequency response: 95Hz - 18kHz
- Sensitivity (1W/1m):  $91 \pm 2$ dB
- Maximum SPL (1m):  $112 \pm 2$ dB
- Design: Streamlined, simple, and elegant shape that complements a variety of decorative styles.
- Driver configuration: Combines a 4.5" fiberglass cone woofer with a 1" neodymium tweeter, delivering a wide frequency response, clear bass, and bright treble.
- Installation: Includes a multi-function mounting bracket for easy setup.
- Construction: Durable aluminum alloy housing and aluminum mesh grille resist deformation and rust.

#### Specifications

Model	DSP6120
Speaker Unit	4.5"×4, 1"×1
Rated Impedance	8Ω
Rated Power(RMS)	120W
Freq. Resp. Range	95Hz-18kHz

Sensitivity(1m,1W)	91±2dB
Max.SPL(1m)	112±2dB
Product Size (H×W×D)	610×140×155mm
Package Size (2PCS/CTN)	717×420×225mm
Net Weight (1PC)	7.8kg
Gross Weight (2PCS/CTN)	17.6kg


## Product Information

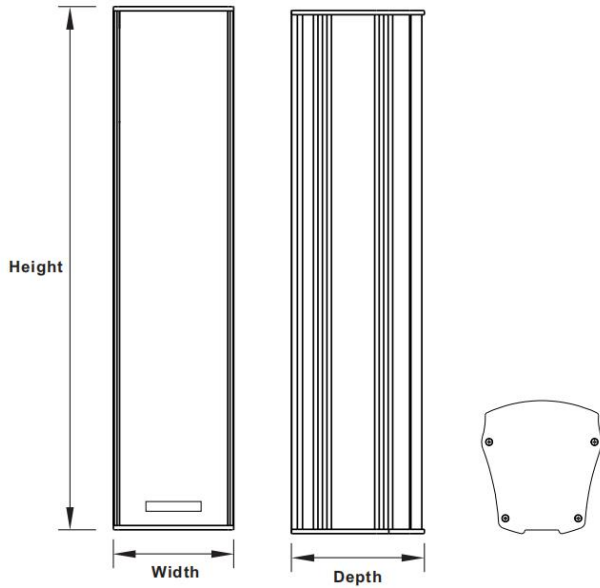

Model	Height	Width	Depth
DSP6120	610	140	155

(Unit: mm)

**Frequency Response Characteristics**  
(dB SPL, 1W, 1m)

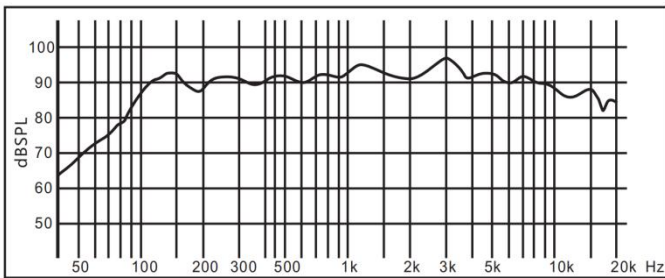

**Distortion Characteristics**  
(THD < 3% 1W, 1m, 100Hz-10kHz)

