

DSP6180

180W Column Surface-Mount Loudspeaker



Description

The DSP6180 is a 180W low-impedance professional conference speaker featuring an aluminum alloy housing with a highly textured appearance. It delivers professional-grade sound performance and satisfies the requirements of demanding venues.

Features


- Rated power: 180W
- Frequency response: 95Hz - 18kHz
- Sensitivity (1W/1m): 92 ± 2 dB
- Maximum SPL (1m): 114 ± 2 dB
- Design: Streamlined, simple, and elegant shape that complements a variety of decorative styles.
- Driver configuration: Combines a 4.5" fiberglass cone woofer with a 1" neodymium tweeter, delivering a wide frequency response, clear bass, and bright treble.
- Installation: Includes a multi-function mounting bracket for easy setup.
- Construction: Durable aluminum alloy housing and aluminum mesh grille resist deformation and rust.

Specifications

| Model | DSP6180 |
|--------------|--------------|
| Speaker Unit | 4.5"×6, 1"×1 |

| | |
|-------------------------|---------------|
| Rated Impedance | 5.3Ω |
| Rated Power(RMS) | 180W |
| Freq. Resp. Range | 95Hz-18kHz |
| Sensitivity(1m,1W) | 92±2dB |
| Max.SPL(1m) | 114±2dB |
| Product Size (H×W×D) | 880×140×155mm |
| Package Size (2PCS/CTN) | 987×420×225mm |
| Net Weight (1PC) | 11.2kg |
| Gross Weight (2PCS/CTN) | 24.8kg |


Product Information

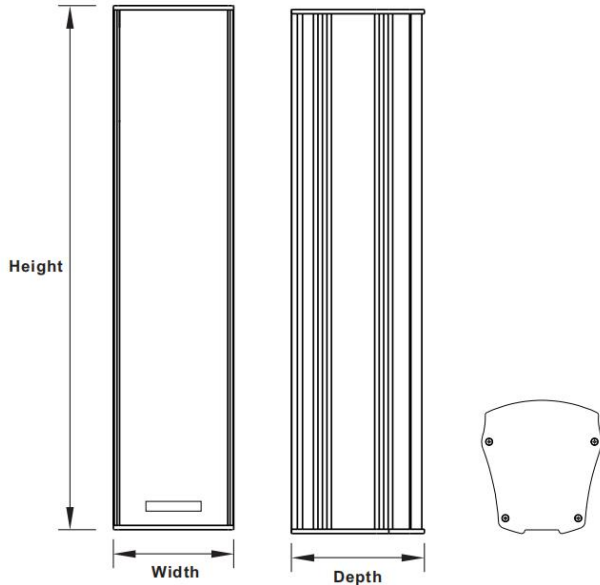

| Model | Height | Width | Depth |
|---------|--------|-------|-------|
| DSP6180 | 880 | 140 | 155 |

(Unit: mm)

Frequency Response Characteristics (dB SPL, 1W, 1m)

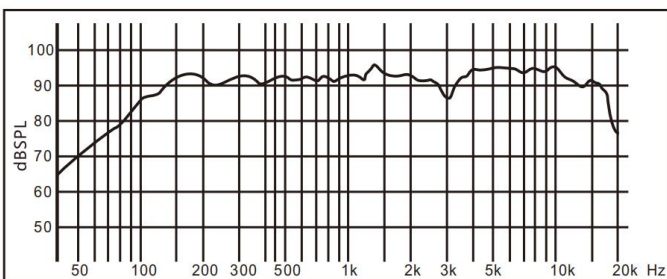

Distortion Characteristics (THD< 3% 1W, 1m, 100Hz-10kHz)

