



DM86C

4x10W Bluetooth Mini In Wall Amplifier with Volume Knob Control

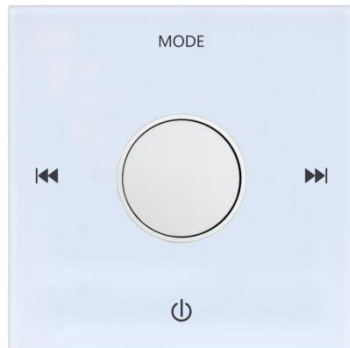

Description

The DM86C Bluetooth Intelligent Music Amplifier with Knob Control is designed for premium audio environments, making it an ideal solution for high-end residences, villas, private clubs, luxury hotels, and other professional music venues.

It supports multiple audio sources, including Bluetooth wireless streaming, MP3 playback, and TF card input (up to 32GB), ensuring flexible and convenient music access.

Featuring an infinite rotary knob volume control, the DM86C allows precise and smooth volume adjustment, enabling users to set the perfect listening or broadcasting level with ease.

With its elegant design and practical functionality, the DM86C is an ideal choice for refined and high-quality background music and audio distribution applications.

Features


- Audio format support: Compatible with MP3 and other common audio formats for flexible playback.
- Bluetooth connectivity: Supports pairing with mobile phones and other Bluetooth-enabled devices for wireless audio streaming.
- External audio input: Allows connection of external audio sources for amplified output through the system.
- TF card support: Equipped with memory card slot, supporting TF cards up to 32GB for local media playback.
- Software upgrade capability: Supports firmware/software updates for system optimization and feature enhancement.
- Volume control: Features a stepless rotary knob for smooth and precise volume adjustment.

Specifications

Model	DM86C
Output Power	4x10W
Bluetooth Distance	10 Meters
Audio Format	MP3,WAV,WMA,FLAC,APE
Load	8 Ohm

Audio SNR	≥98dB
Power Supply	AC220V (50 HZ) allows 90V-250V
Product Size	86*86*13mm
Bluetooth Audio Format	MP3,WMA,APE,FLAC,WAV

Product Information:

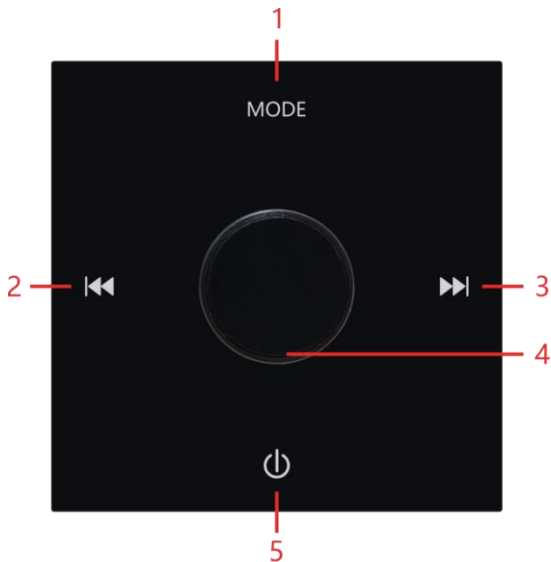

1. Mode switching: Touch-switch mode FM-Bluetooth-AUX-USB / TF; with prompt sound indicating the current state;

2. Last song: The touch can switch to the last song;

3. Next song: Touch can switch to the next song;

4. Knob left and right rotation to control the volume addition and decrease, press can pause / play, radio mode long press can search channel;

5. Switch machine key: Long press shutdown, short press boot;



6. TF card insertion seat: TF card gap insertion seat to the right, the maximum support of 32G capacity;

7. Host USB seat: Wired USB can upgrade the system of the host;

8. Power key: Pull, open and close the power supply;

9. Power input line AC: 90V-250V: Two copper core wire, single copper core 0.75 square above;



10.FM signal line: Choose single stock line, the core diameter is not less than 1mm, the length of more than 2 meters;

11.AUX audio input: Audio line (two-core shielding line: commonly known as microphone line), RVVP2X0.5, RVVP2X0.75;

12.Fixed resistance top horn: 8 ohm 10-30W fixed resistance top horn can be connected;