

DSP6240

240W Column Surface-Mount Loudspeaker



Description

The DSP6240 is a 240W low-impedance professional conference speaker housed in an aluminum alloy enclosure with a highly textured appearance. It delivers professional-grade sound performance and meets the requirements of demanding venues.

Features


- Rated power: 240W
- Frequency response: 95Hz - 18kHz
- Sensitivity (1W/1m): 93 ± 2 dB
- Maximum SPL (1m): 117 ± 2 dB
- Design: Streamlined, simple, and elegant shape that complements a variety of decorative styles.
- Driver configuration: Combines a 4.5" fiberglass cone woofer with a 1" neodymium tweeter, delivering a wide frequency response, clear bass, and bright treble.
- Installation: Includes a multi-function mounting bracket for easy setup.
- Construction: Durable aluminum alloy housing and aluminum mesh grille resist deformation and rust.

Specifications

Model	DSP6240
Speaker Unit	4.5"×8, 1"×1

Rated Impedance	4Ω
Rated Power(RMS)	240W
Freq. Resp. Range	95Hz-18kHz
Sensitivity(1m,1W)	93±2dB
Max.SPL(1m)	117±2dB
Product Size (H×W×D)	1100×140×155mm
Package Size (2PCS/CTN)	1207×420×225mm
Net Weight (1PC)	14.1kg
Gross Weight (2PCS/CTN)	31.5kg


Product Information

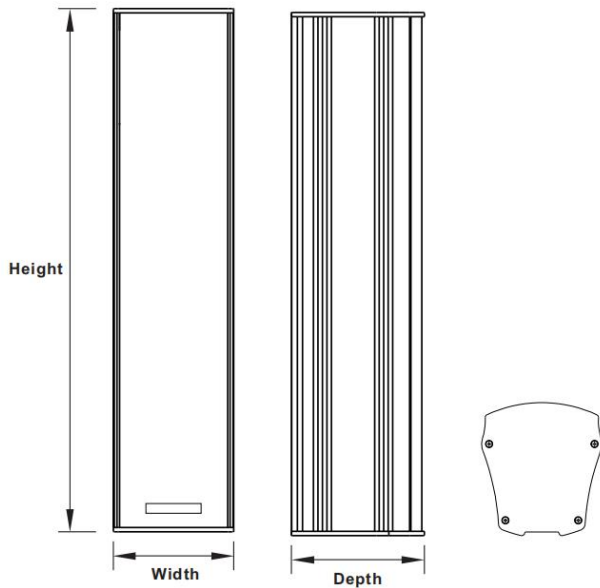

Model	Height	Width	Depth
DSP6240	1100	140	155

(Unit: mm)

Frequency Response Characteristics (dB SPL, 1W, 1m)

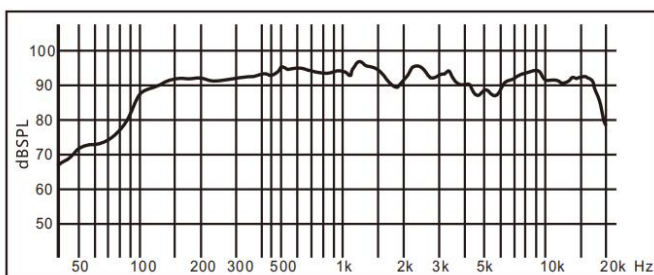

Distortion Characteristics (THD < 3% 1W, 1m, 100Hz-10kHz)

